


Cyclone (GC)

PALADIN
DEMOLITION AND RECYCLING

APPLICATIONS

- Trenching
- Quarry Work
- Demolition
- Tunneling & Mine Work
- Soil Remediation

TRENCHING DETAILS




The Genesis Cyclone can generate a minimum trench width of 32.5" or 40", depending on the Cyclone model used.

Mounting bracket allows easy installation and removal on a range of 70,000 lb. to 100,000 lb. excavators

Single 24" or 35" drum - depending on model - maximizes material processing per pass

Cyclone 'MR' models include easily-adjusted manual rotation capabilities that lock into 90° intervals for greater versatility when processing material

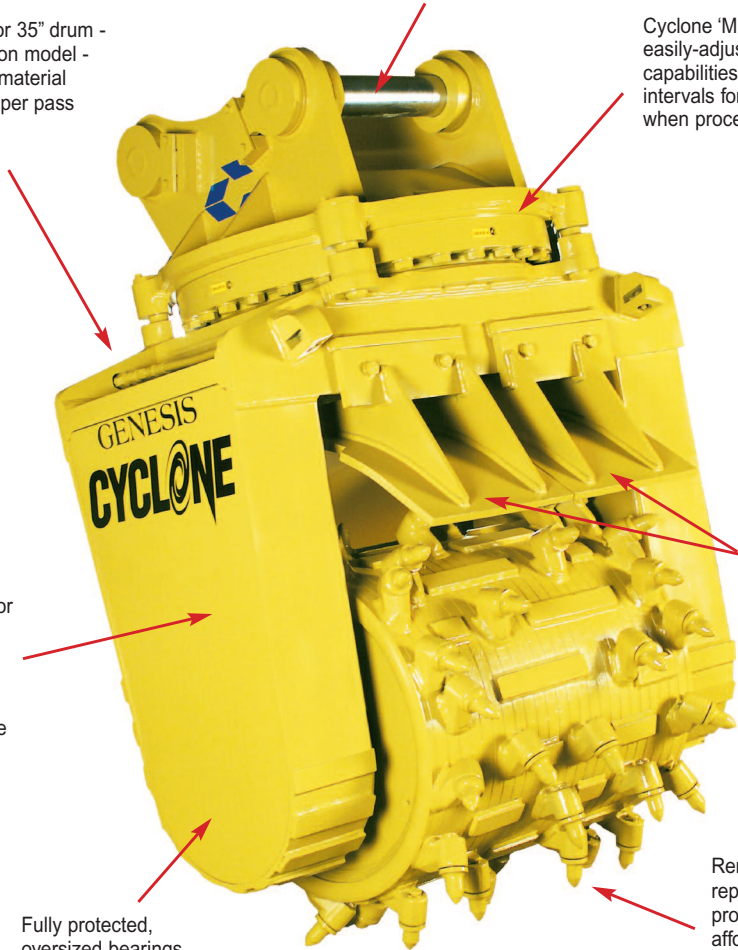

Shorter, two-piece rock shield allows easier use in narrower trenches

Heavy-duty hydraulic motor and gearbox ensure solid performance and long attachment life

Fully protected, oversized bearings for long-term reliability

Removable, replaceable carbide processing teeth afford maximum grinding productivity and wear life

Model Number	Cyclone Weight (lbs.)	Overall Height (ins.)	Overall Width (ins.)	Drum Width (ins.)	Drum Diameter (w/teeth)	Oil Flow (gpm)	Hydraulic Pressure (psi)	Minimum Excavator Wt. (lbs.)
GC 550	5,550	57.5	47.5	24	32.5	60-100	4,500	70,000
GC 550 MR	6,200	64.5	47.5	24	32.5	60-100	4,500	70,000
GC 950	8,000	70	57.5	35	40	90-120	4,500	100,000
GC 950 MR	8,800	77	57.5	35	40	90-120	4,500	100,000

All Genesis "MR" model Cyclones feature manual rotation capability. All Genesis Cyclones are covered by a 12-month, 1,500-hour (whichever occurs first) warranty. Genesis reserves the right to continually make product improvements designed to positively enhance product performance.