



MCP LINE


FIXED PULVERIZERS




SECONDARY
DEMOLITION



REINFORCED
CONCRETE




QUICK
MAINTENANCE



REPLACEABLE
TEETH/BLADES



SPEED
VALVE




SMART BOX



MCP-IT

INTERCHANGEABLE TEETH

HIGH PERFORMANCE DESIGN



The **Speed-Valve** reduces opening and closing times, improving productivity.



Interchangeable plates, made up of 2 independent parts, allow quick replacement of worn teeth.



Real-time tracking of equipment performance.




New **cylinder shield*** designed for the best protection in every situation.

* Check models availability with the sales office




The **reinforced structure** of the MCP-IT is designed for the demolition of reinforced concrete.



The **specific design** of the mouth is designed for effective ground demolition.




The **Interchangeable plates** are available in **two versions** with different tothing to adapt to the kind of demolition to face.
The two parts that make up the plate are made by casting process that ensure high resistance.

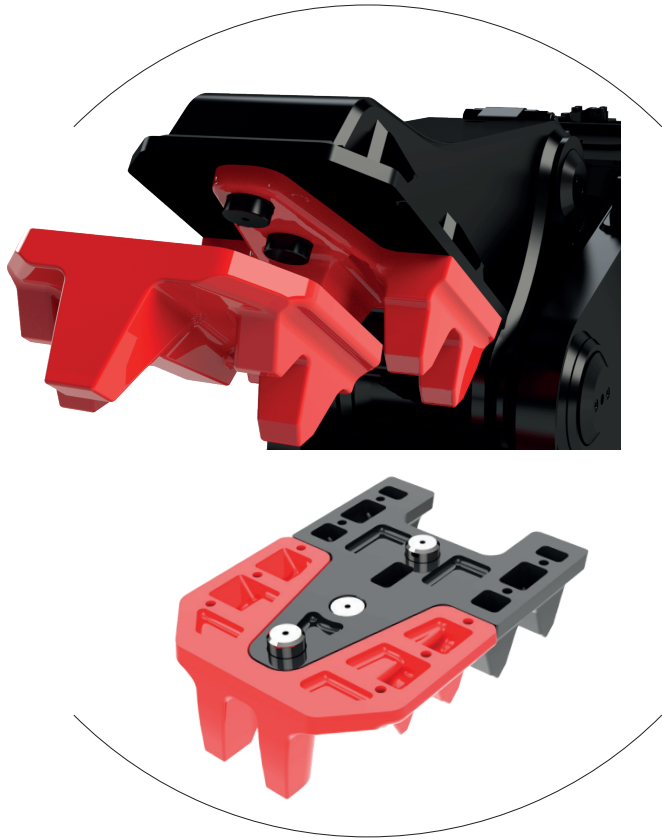

* Available for MCP800-IT,
MCP910-IT

* Check availability
with the sales office

UPPER JAW PLATES

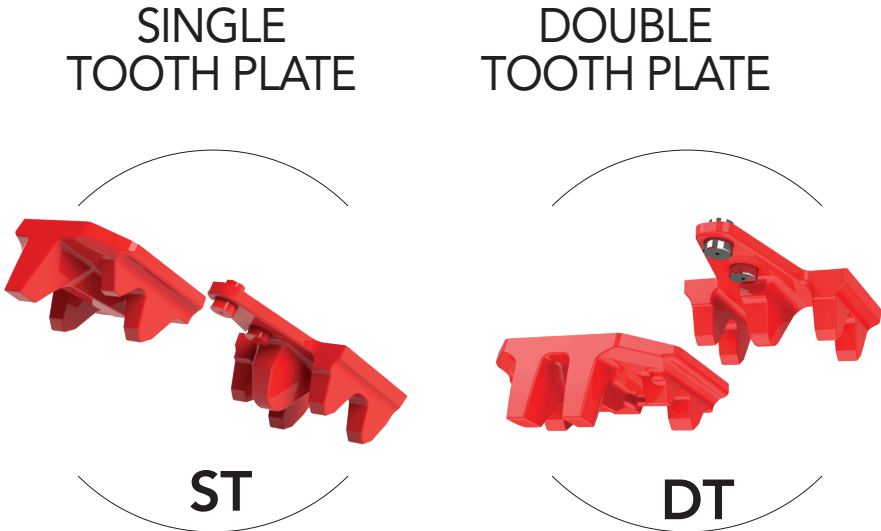

LOWER JAW PLATES



DATA SHEETS

RIF. 97877IT/E 04/21 REV.03 BT MCPIT 600-1300 04

MODEL		MCP600-IT	MCP800-IT	MCP910-IT	MCP1000-IT	MCP1300-IT
EXCAVATOR WEIGHT	t	11-18	18-27	28-38	39-50	60-90
TOOL WEIGHT *	kg	1.050	2.200	3.100	4.200	8.000
OPENING	mm	620	830	1.000	1.150	1.300
HEIGHT MAX	mm	1.600	2.070	2.400	2.700	3.250
ST PLATE		●	●	●	●	○
DT PLATE		●	●	●	●	●
HYDRAULIC WORKING PRESSURE	bar	280-320	280-320	280-320	280-320	320-350
OIL FLOW	l/min	100-180	180-220	300-340	335-375	500-600


We are constantly improving our products and therefore we reserve the right to change the design and technical specifications without prior notice.

* Tool weight does include Mantovanibenne top bracket.

MCP

FIXED TEETH

**PROCESS LARGE
VOLUMES OF MATERIAL
ON THE GROUND**



MCP ensures great performance thanks to a **simple and essential design**. It is designed for **secondary demolition** work on the ground.




The **crushing process** separates the concrete from the inside iron reinforcement.



The **Speed-Valve** reduces opening and closing times, improving productivity.



The **metal armor cutting** edges are interchangeable and can be used on 4 sides before replacement.



Real-time tracking of equipment performance

DATA SHEETS

MODEL		MCP300	MCP480	MCP800	MCP910
EXCAVATOR WEIGHT	t	2-4	5-10	18-27	28-38
TOOL WEIGHT *	kg	150	490	2.050	2.850
OPENING	mm	300	480	850	1.000
HEIGHT MAX	mm	770	1.225	2.070	2.400
ST PLATE	bar	200-250	220-280	280-320	280-320
DT PLATE	l/min	30-60	80-100	180-220	220-280

We are constantly improving our products and therefore we reserve the right to change the design and technical specifications without prior notice.

* Tool weight does include Mantovanibenne top bracket.